




1010EP20


12 Volt electronic flasher

- Socket Mountable
- Precise square wave I.C controller
- High temperature plastic enclosure
- Standard two terminal J.S.O. pin-out
- Solid state relay driver technology
- Safety warning with fast flash rate when one lamp fails




Application

- J.S.O. FLASHER APPLICATIONS
 - Designed to Meet International Standards
 - 2 Lamp Turn Signal, 4 Lamp Hazard Flasher




Design Life

- 400 Hours as a Combination Flasher

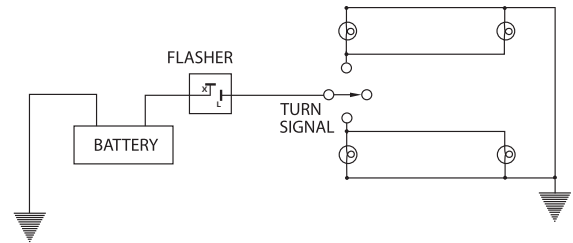

Technology vs design life vs lamp load

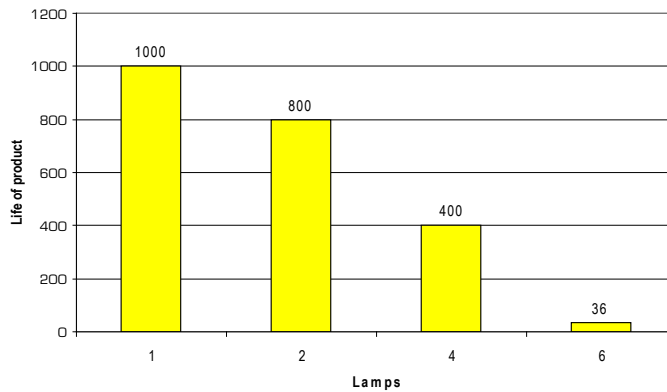

Characteristic	Min	Max	Unit
Load Rating	2	4	Lamps
Flash Rate	60	120	Flash/min
Duty Cycle	35	75	%
Time to 1st Flash		.75	Seconds
Voltage Drop		40	V @ Max Load
Voltage Range	11	15	Volts
Temperature Range	-40	+85	Degrees C

>address

Triscan a/s
 Engmarken 11
 DK-8220 Brabrand
 Denmark

>contact

Phone +45 8622 5811
 Fax +45 8622 5877

>contact

email auto@triscan.dk
 www.triscan.com